

# T2 ASP

Surface Range / Aspect




High performance surface mounted luminaire with a modern design allowing light to flow through into the endcaps.

### Specification

- Extruded polycarbonate
- U.V. stabilised to prevent discolouring
- Fabricated steel body
- Night Light
- LED 4000°K
- Powder coated finish
- Choice of colour filter option
- Integrated gear tray cover
- Polycarbonate end cap

### Application

- Corridors
- Healthcare
- Schools / Colleges etc
- Medical Centre

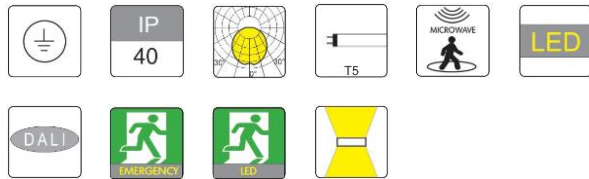

### Product Codes

<b>LED</b>	T2ASP4400EZ	4ft Prismatic / Opal Diffuser	1200mm	30W	4400Lm
<b>LED</b>	T2ASP6720EZ	4ft Prismatic / Opal Diffuser	1200mm	50W	6720Lm
<b>LED</b>	T2ASP9040EZ	4ft Prismatic / Opal Diffuser	1200mm	75W	9040Lm
<b>LED</b>	T2ASP5500EZ	5ft Prismatic / Opal Diffuser	1500mm	38W	5500Lm
<b>LED</b>	T2ASP8400EZ	5ft Prismatic / Opal Diffuser	1500mm	62W	8400Lm
<b>LED</b>	T2ASP11300EZ	5ft Prismatic / Opal Diffuser	1500mm	94W	11300Lm
<b>EM</b>	Add suffix /EM for 3hr Maintained Emergency				

**IMPROVEMENTS** Wattage consumption and performance is subject to improvements. Please check the current technical data at the time of purchase.

### Optional Extras

- OEM-ASP-01 Blue Filter Insert
- OEM-ASP-01 Red Filter Insert
- OEM-ASP-01 Green Filter Insert
- OEM-ASP-01 Continuous Linking Kit See page 42

### Dimensions

